





Athlete must check all screws and fasteners prior to use to ensure they are tight and to prevent harness from falling apart during use! Maverick Biathlon is not liable for any damage due to failure to tighten all screws and fasteners

Carrying Harness How-To

A. Installation on the Rifle

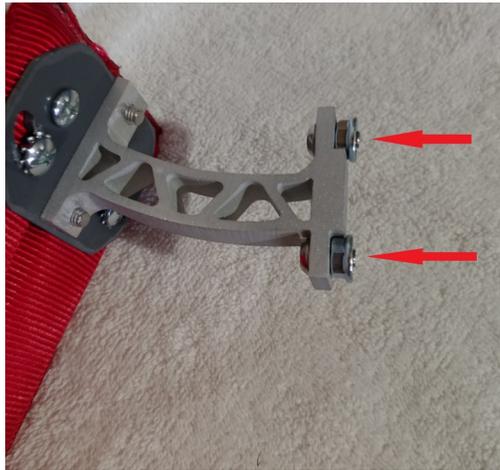


1-Loosen the nuts on the mounting bracket

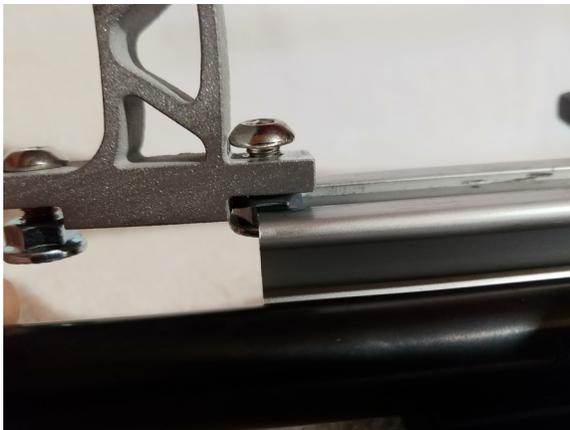


2-Slide the mounting bracket on to the rail ensuring that the shoulder straps are pointing up towards the barrel

3-Tighten down the mounting screws with a 4mm hex head wrench at the proper location for the athlete (can be adjusted later)

B. Adjustment of Shoulder Pad Angle

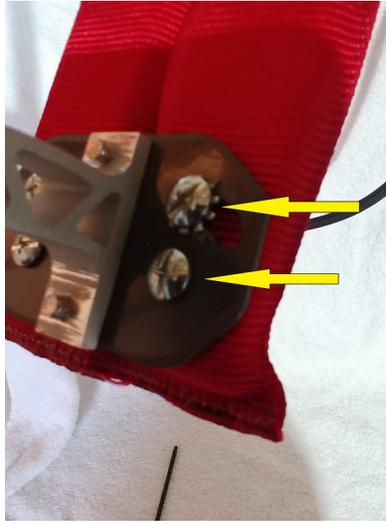

1-Locate the angle adjustment screws on the back of the mounting plate and loosen them with a #2 phillips (cross tip) screwdriver

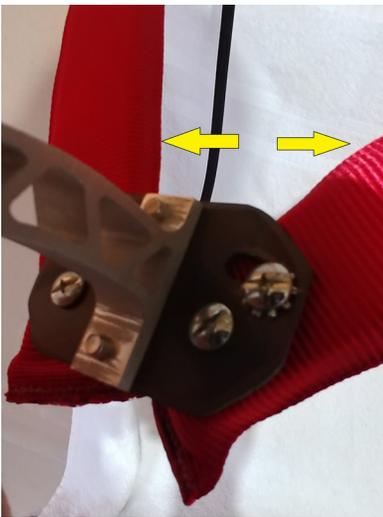

2-Adjust the angle of the shoulder straps to fit the athlete then tighten up all four screws

Athlete must check all screws and fasteners prior to use to ensure they are tight and to prevent harness from falling apart during use! Maverick Biathlon is not liable for any damage due to failure to tighten all screws and fasteners

C. Installation of Pad (optional)




1-Place the pad on the rifle underneath the harness bracket with the hook & loop wings towards the bracket and start to wrap the wings around the sides of the bracket



2-Fold the bottom end of the pad up over the front of the bracket plate and ends of the shoulder strap and wrap the hook & loop wings around the bottom end of the pad, basically you are wrapping the bracket plate up inside the pad.

Athlete must check all screws and fasteners prior to use to ensure they are tight and to prevent harness from falling apart during use! Maverick Biathlon is not liable for any damage due to failure to tighten all screws and fasteners

D. Removal and Installation of Bungee

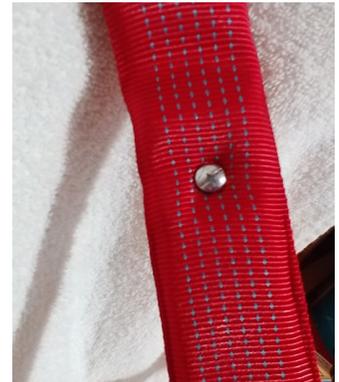

1-Locate the bungee attachment screw on the front and back of the shoulder strap and loosen with a #2 phillips (cross tip) screwdriver.



2-Remove both pieces of the screw and pull the bungee out of the shoulder strap



3-To install, insert the end of the bungee into the shoulder strap, ensuring that the smooth side of the crimped on terminal is facing up. There is a groove inside the strap that will guide the terminal to the correct location as long as it is on top of the padding. Insert the female piece of the screw into the shoulder strap, through the terminal and install the male piece in from the back side of the strap and tighten down.

Athlete must check all screws and fasteners prior to use to ensure they are tight and to prevent harness from falling apart during use! Maverick Biathlon is not liable for any damage due to failure to tighten all screws and fasteners